

# Emergency Aid Camp Infrastructure



## Swallow S50DF

### 2" x 2" Fuel Transfer Self Priming Centrifugal Pump with Lombardini 15LD315 Diesel Engine

Applications include:

Diesel & Jet A Fuels and Similar Products with a Flash Point of More Than 35°C

**Not for Pumping Petroleum**





- Robust Cast Iron Construction
- Rigid Monobloc Design
- Fabricated Steel Baseplate with Fixing Holes
- 'Viton' Gaskets and O Rings
- Solids Handling to 25 mm Ø
- Integral Non Return Valve & Renewable Wear Plate
- Self Priming to 5 m
- Carbon/Ceramic Mech. Seal
- Stainless Steel Shaft Sleeve
- Removable Screwed BSP 60° Cone
- Male Connections with Blanking Caps & Retaining Chains

Powered by a Lombardini lightweight industrial air cooled single cylinder diesel engine model 15LD315 developing 4.5 kW at a nominal 3600 rpm complete with recoil start, 4.3 litre 4 hour fuel tank, throttle control, silencer with spark arrestor, replaceable element air, oil and fuel filters. Optional mechanical over speed shutdown device available.

Set is supplied with Pump and Engine Operating and Instruction Manuals.

#### Standard Options:

- A. Individual plywood case packing.
- B. Pump spares for 1000 hours normal operation.
- C. Engine spares for 1000 hours normal operation.
- D. Hose kit
- E. Special couplings
- F. Site trolley

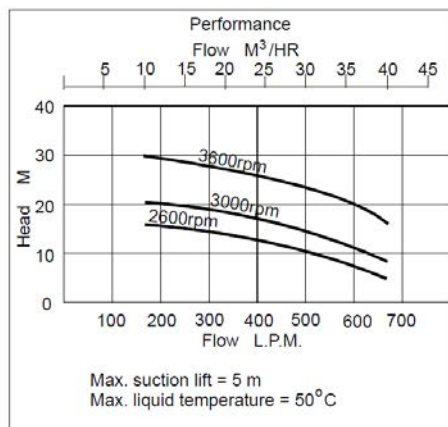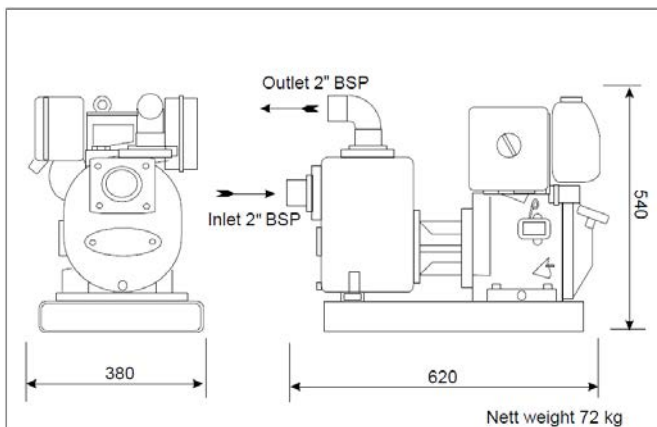

#### Butyl Products Ltd.

Lingfield House, 11 Radford Crescent, Billericay, Essex,  
CM12 0DW, United Kingdom. T: +44 (0) 1277 653 281

F: +44 (0) 1277 657 921 E: [enquiries@butylproducts.co.uk](mailto:enquiries@butylproducts.co.uk)

W: [butylproducts.co.uk](http://butylproducts.co.uk)